



DEWMARK  
HEAVY

SV 42/210



Joint width  
210 mm



Top  
mounted



Max load  
30 kN



Movements in  
3 directions



Protection  
rating IP 30




Indoor/  
outdoor

FLOOR COVERING

TILE

POLYMER

CONCRETE

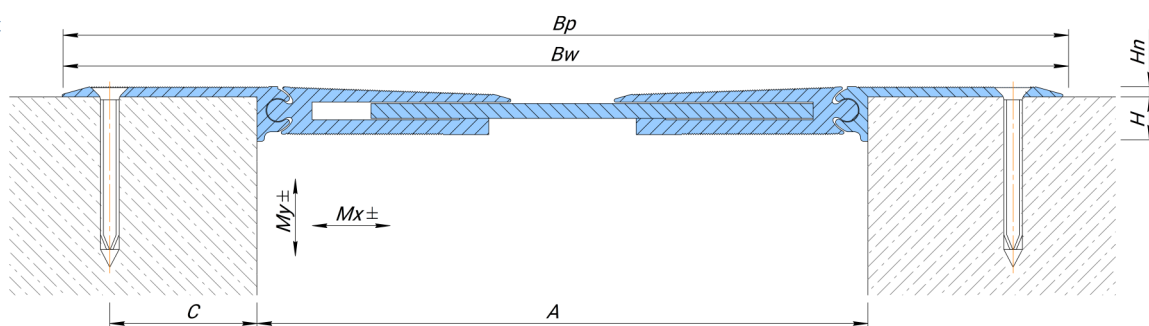

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 42/210/N	210	342	342	15	3,5	50	40 (+20/-20)	40 (+20/-20)	30	-	-	-

### Technical data

#### MATERIAL

Aluminium EN AW 6060T6

#### LENGTH

3 meters

#### STANDARD COLOR

silvery white

### On request

Protective anodizing profile

### Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by an corner guide.  
This profile is denoted by the index "E":

example SV-E 42/210/N

