



**DEWMARK
HEAVY**

SVSS 45/155



Joint width
155 mm



Recess
mounted



Max load
100 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

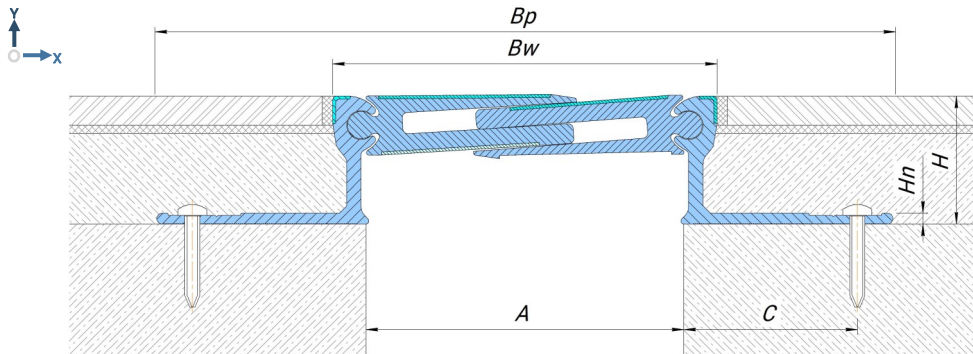

Technical data

MATERIAL

Aluminium EN AW 6060T6,
Stainless steel AISI 304

LENGTH

3 meters

STANDARD COLOR

silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SVSS 45/155/53	155	175	300	53	4	70	60 (+30/-30)	50 (+25/-25)	50	100	70	30
SVSS 45/155/80	155	175	315	80	4	70	60 (+30/-30)	50 (+25/-25)	50	100	70	30

Specifications

The Dewmark Heavy SVSS 45 profile is completed with stainless steel decorative overlays:

AISI 430, AISI 304, AISI 316, AISI 321

Various textures of decorative types of stainless lining can be selected for any interior.

Overlays are fixed on the profile with high-strength glue that is resistant to:

- to negative temperatures down to -40C,
 - aggressive media (including floor cleaning).
- What allows to apply it not only in interiors of rooms, but also out of buildings.



On request

Ask for all possible options for decorative stainless steel.