



**DEWMARK  
HEAVY**

**SV 42/80**

Joint width  
80 mm

Top  
mounted

Max load  
100 kN


Movements in  
3 directions

Protection  
rating IP 30

Indoor/  
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

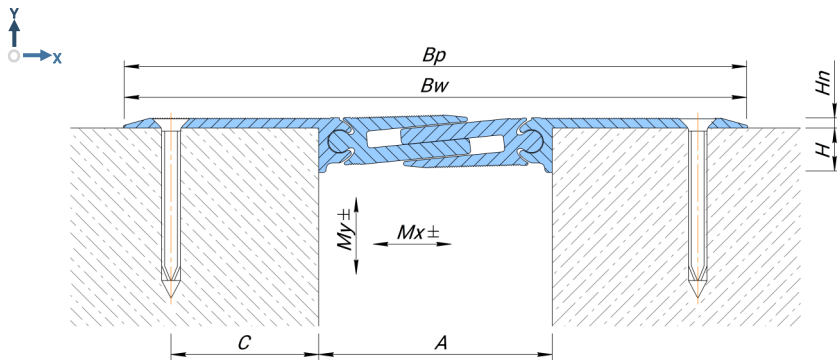

### Technical data

**MATERIAL**  
Aluminium EN AW 6060T6

---

**LENGTH**  
3 meters

---

**STANDARD COLOR**  
silvery white

Profile	A (mm)	B <sub>w</sub> (mm)	B <sub>p</sub> (mm)	H (mm)	H <sub>p</sub> (mm)	C (mm)	M <sub>x</sub> (mm)	M <sub>y</sub> (mm)	Load bearing capacity, kN			
SV 42/80/N	80	212	212	15	3,5	50	24 (+12/-12)	20 (+10/-10)	50	100	70	-

! Plastic and solid wheels are not recommended for use.

On request

Protective anodizing profile

### Corner versions

All profiles have a corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by a corner guide.

This profile is denoted by the index "E":

example SV-E 42/80/N

