



**DEWMARK
HEAVY**

SV 41/65



Joint width
65 mm



Recess
mounted



Max load
100 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

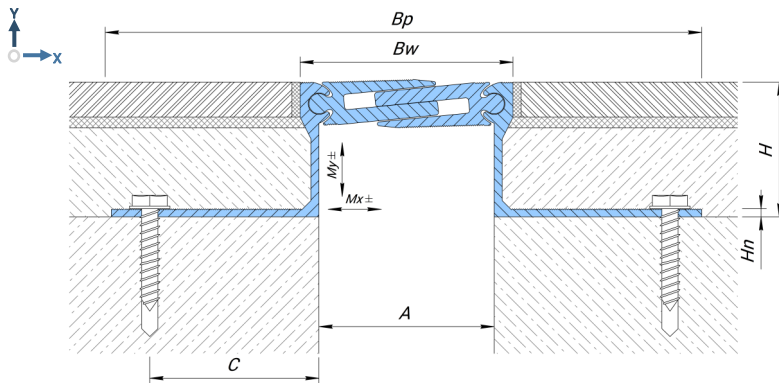

Technical data

MATERIAL
Aluminium EN AW 6060T6

LENGTH
3 meters

STANDARD COLOR
silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 41/65/16	65	80	195	16	2,3	50	24 (+12/-12)	14 (+7/-7)	50 ¹	70 ¹	50 ¹	-
SV 41/65/20	65	80	214	20	3	60	24 (+12/-12)	14 (+7/-7)	50 ¹	70 ¹	70 ¹	-
SV 41/65/25	65	80	210	25	3	60	24 (+12/-12)	20 (+10/-10)	50 ¹	100 ¹	70 ¹	5 ¹
SV 41/65/34	65	80	220	34	3	60	24 (+12/-12)	20 (+10/-10)	50 ¹	100 ¹	70 ¹	5 ¹
SV 41/65/50	65	80	218	50	3	60	24 (+12/-12)	20 (+10/-10)	50	100	70	5
SV 41/65/70	65	80	215	70	3,5	60	24 (+12/-12)	20 (+10/-10)	50	100	70	5
SV 41/65/80	65	80	219	80	3,5	60	24 (+12/-12)	20 (+10/-10)	50	100	70	5
SV 41/65/100	65	80	215	100	4	60	24 (+12/-12)	20 (+10/-10)	50	100	70	5
SV 41/65/120	65	80	215	120	4	60	24 (+12/-12)	20 (+10/-10)	50	100	70	5
SV 41/65/150	65	80	223	150	4,5	60	24 (+12/-12)	20 (+10/-10)	50	100	70	5

¹Not for permanent use (requires coordination) - the risk of breaking off the topcoat

On request

Other profile heights on request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SV-E 41/65/50

