



**DEWMARK
HEAVY**

SV 43/35

Joint width
35 mm

Recess
mounted

Max load
600 kN


Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

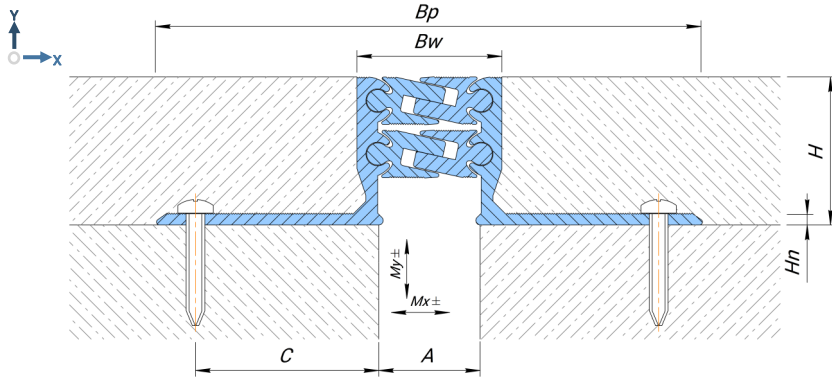

Technical data

MATERIAL
Aluminium EN AW 6060T6

LENGTH
3 meters

STANDARD COLOR
silvery white

| Profile | A (mm) | Bw (mm) | Bp (mm) | H (mm) | Hn (mm) | C (mm) | Mx (mm) | My (mm) | Load bearing capacity, kN | | | |
|-------------|--------|---------|---------|--------|---------|--------|------------|------------|---------------------------|------------------|------------------|-----------------|
| | | | | | | | | | | | | |
| SV 43/35/34 | 35 | 50 | 190 | 34 | 3 | 60 | 10 (+5/-5) | 10 (+5/-5) | 50 ¹ | 600 ¹ | 100 ¹ | 30 ¹ |
| SV 43/35/50 | 35 | 50 | 185 | 50 | 4 | 60 | 10 (+5/-5) | 10 (+5/-5) | 50 | 600 | 100 | 30 |
| SV 43/35/80 | 35 | 50 | 185 | 80 | 4 | 60 | 10 (+5/-5) | 10 (+5/-5) | 50 | 600 | 100 | 30 |

¹Not for permanent use (requires coordination) - the risk of breaking off the topcoat

On request

Other profile heights on request

Protective anodizing profile