



DEWMARK
STANDART

SV 22/55

Joint width
55 mm


Top
mounted

Movements in
6 directions

Protection
rating IP 52

Indoor/
outdoor

FLOOR COVERING TILE LINOLEUM POLYMER CONCRETE

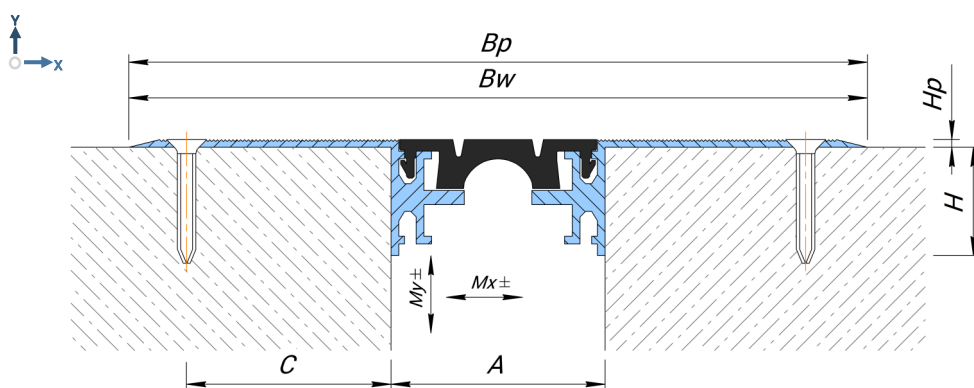

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6,
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 22/55	55	191	191	28	2	50	20 (+10/-10)	10 (+5/-5)				
									30	70	50	-

! With heavy traffic, the flexible insert will be subject to wear.

On request

Profile insert can be made in
any color according to RAL
(see website www.ral.de).

Corner versions

All profiles have an corner version (wall to floor
under an angle of 90 degrees).
One of the guides is replaced by an corner guide.
This profile is denoted by the index "E": *example*
SV-E 22/55

