



**DEWMARK
METALL**

SG-ZZ 85



Joint width
20-100 mm



Recess
mounted



Max load
100 kN




Movements in
1 directions



Protection
rating IP 30



Indoor/
outdoor

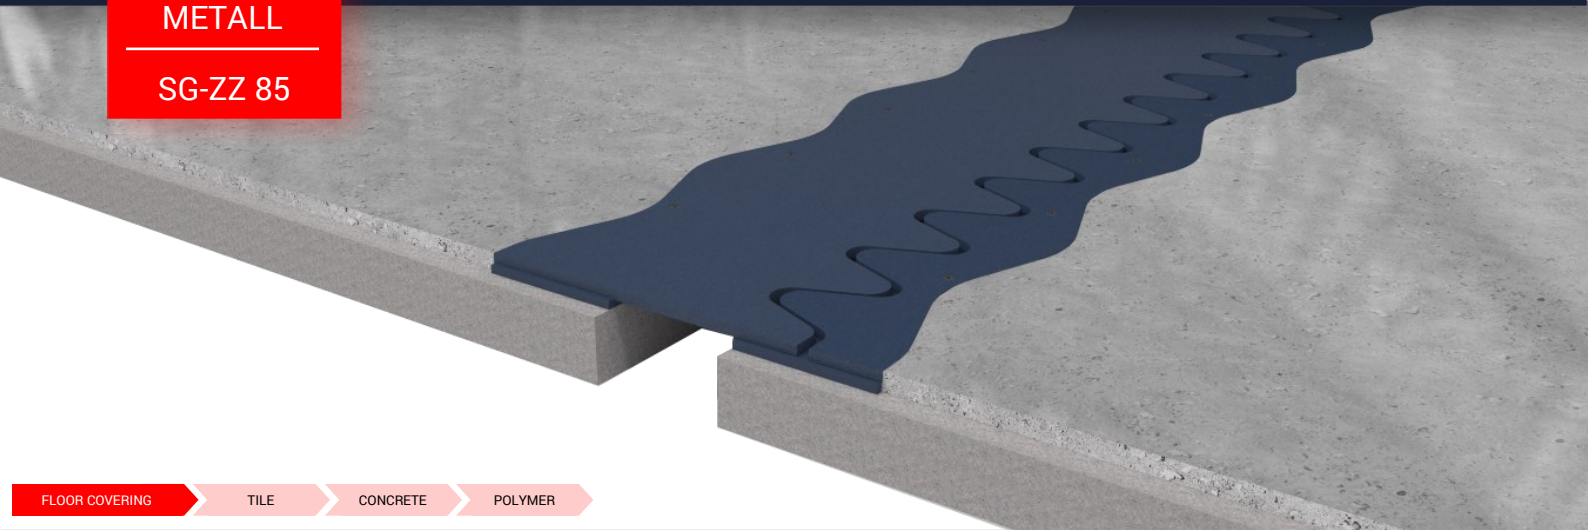


FLOOR COVERING

TILE

CONCRETE

POLYMER

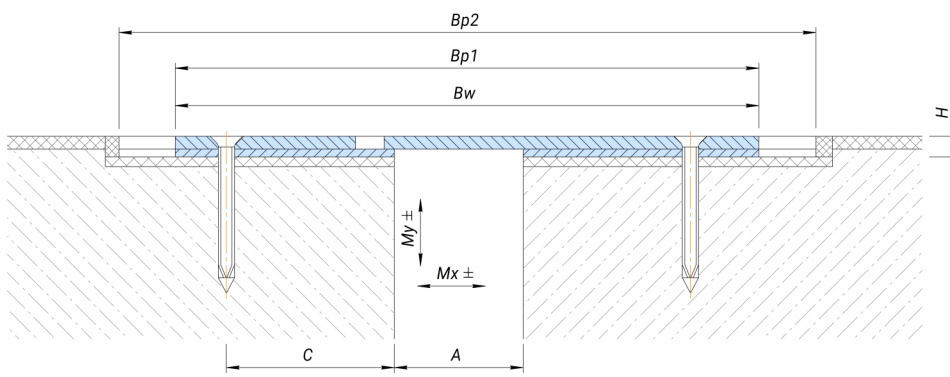

Technical data

MATERIAL

Steel S235

LENGTH

2.48 meters

STANDARD COLOR (RAL)

7035

Profile	A (mm)	H (mm)	Bw (mm)	Bp1 (mm)	Bp2 (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SG-ZZ 85/20	20	6	190	190	220	65	20 (+10/-10)	-	50	100	50	20
SG-ZZ 85/30	30	6	200	200	230	65	20 (+10/-10)	-	50	100	50	20
SG-ZZ 85/50	50	7	220	220	250	65	20 (+10/-10)	-	50	100	50	20
SG-ZZ 85/80	80	8	250	250	280	65	20 (+10/-10)	-	50	100	50	20
SG-ZZ 85/100	100	9	280	280	310	70	20 (+10/-10)	-	50	100	50	20

On request

The values of movements may be different.

Any color of coloring according to the RAL catalog (see www.ral.de).

Profile length can be changed by agreement.

Making a profile in whole or in part of stainless steel.

Profile assembly

The kit includes high-strength screws for concrete

Pay attention

Vertical movements are not allowed.