



DEWMARK  
STANDART

SV 24/55


Joint width  
55 mm

Top  
mounted


Movements in  
6 directions

Protection  
rating IP 52

Indoor/  
outdoor

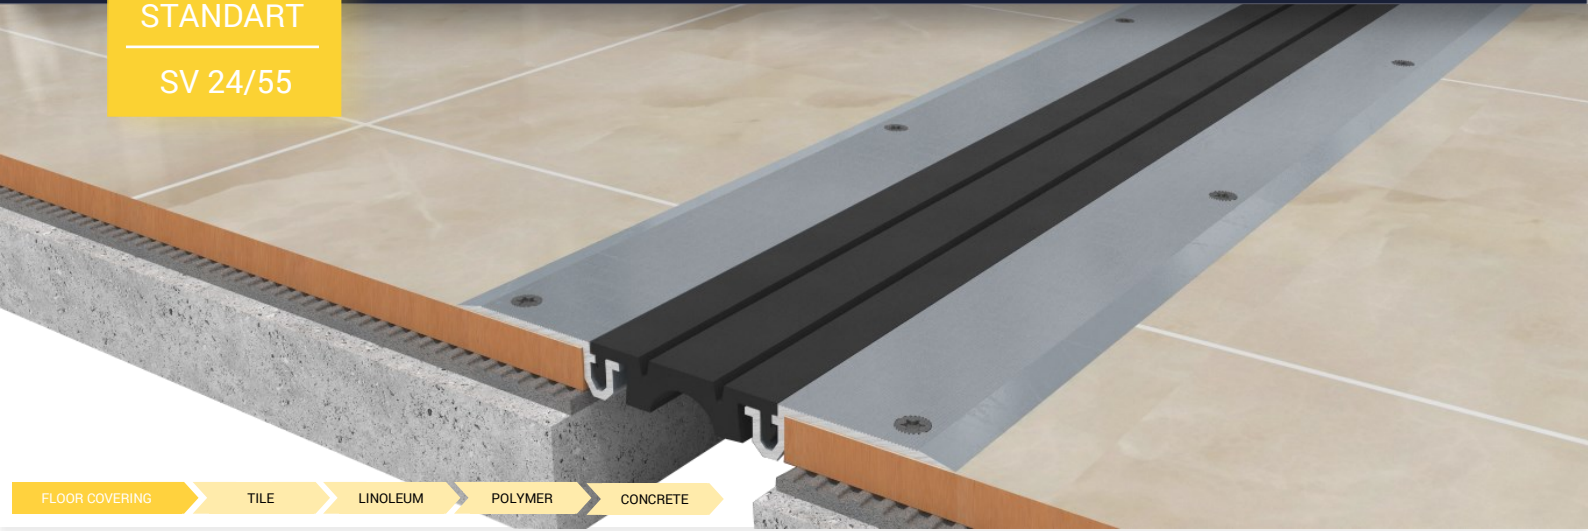

FLOOR COVERING → TILE → LINOLEUM → POLYMER → CONCRETE

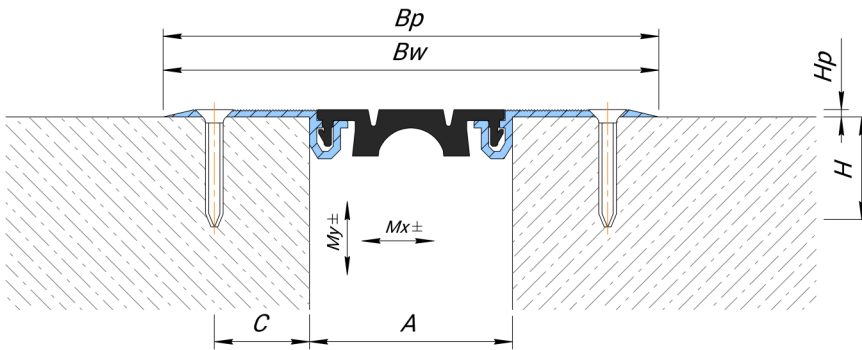

### Technical data

#### MATERIAL

Profile: aluminium EN AW 6060T6,  
Insert: PVC-P

#### LENGTH

3 meters

#### STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN
SV 24/55	55	135	135	10	2	25	20 (+10/-10)	10 (+5/-5)	pedestrian

! With heavy traffic, the flexible insert will be subject to wear.

### On request

Profile insert can be made in  
any color according to RAL  
(see website [www.ral.de](http://www.ral.de)).

### Corner versions

All profiles have a corner version (wall to floor  
under an angle of 90 degrees).  
One of the guides is replaced by a corner guide.  
This profile is denoted by the index "E": *example*  
SV-E 24/55

