



DEWMARK  
METALL

SG 87



Joint width  
30-50 mm



Recess  
mounted



Max load  
600 kN




Movements in  
1 directions




Protection  
rating IP 30



Indoor/  
outdoor

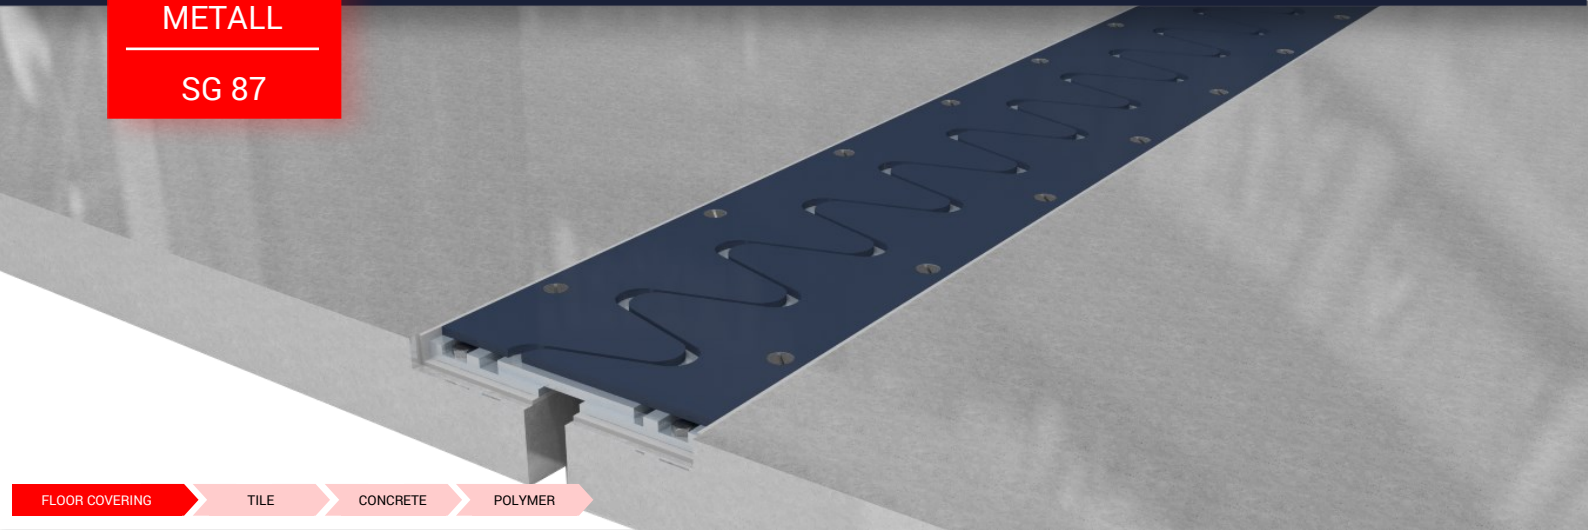

FLOOR COVERING → TILE → CONCRETE → POLYMER

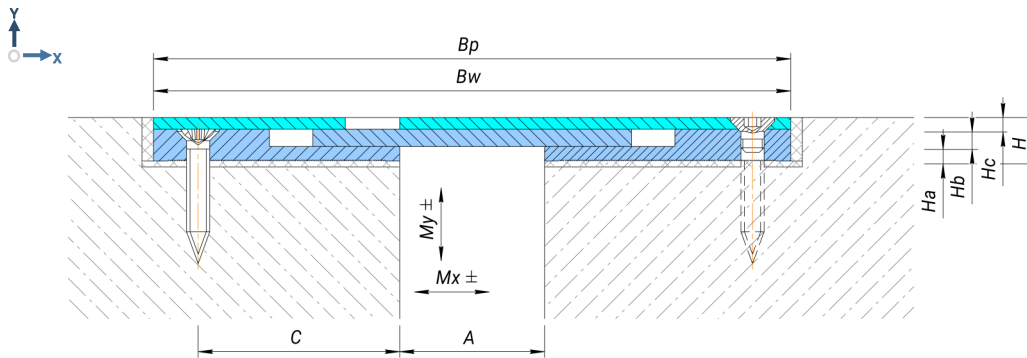

### Technical data

#### MATERIAL

AISI 430

Aluminium EN AW 6060T6

#### LENGTH

2.48 meters

#### STANDARD COLOR (RAL)

matte gray

Profile	A (mm)	H (mm)	Bw (mm)	Bp (mm)	Ha (mm)	Hb (mm)	Hc (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SG 81/20/190/15	30	15	200	200	5	5	5	70	30 (+15/-15)	-	50	200	70	30
SG 81/30/200/15	50	15	220	220	5	5	5	70	30 (+15/-15)	-	50	200	70	30

### Profile assembly

The profile is supplied complete with mounting brackets. The kit includes high-strength screws for concrete and stainless steel screws.

### On request

It is possible to make a profile with a wavy upper part of steel S235 with painting.

### Pay attention

Vertical movements are not allowed.

For continuous operation, periodic profile cleaning is recommended. The accumulation of dirt leads to the breakdown of the profile.