



**DEWMARK
HEAVY**

SV 41/135



Joint width
135 mm



Recess
mounted



Max load
50 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

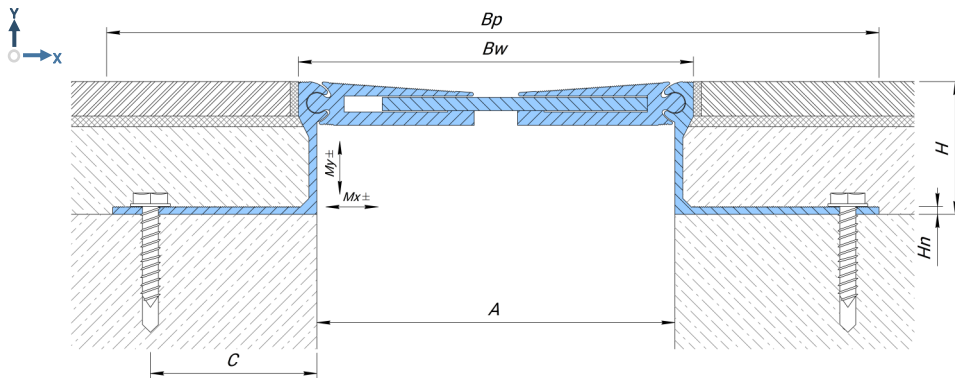

Technical data

MATERIAL
Aluminium EN AW 6060T6

LENGTH
3 meters

STANDARD COLOR
silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN
SV 41/135/16	135	150	265	16	2,3	50	30 (+15/-15)	34 (+17/-17)	30 ¹
SV 41/135/20	135	150	284	20	3	60	30 (+15/-15)	34 (+17/-17)	30 ¹
SV 41/135/25	135	150	280	25	3	60	30 (+15/-15)	34 (+17/-17)	30 ¹
SV 41/135/34	135	150	290	34	3	60	30 (+15/-15)	34 (+17/-17)	50 ¹
SV 41/135/50	135	150	288	50	3	60	30 (+15/-15)	34 (+17/-17)	50
SV 41/135/70	135	150	285	70	3,5	60	30 (+15/-15)	34 (+17/-17)	50
SV 41/135/80	135	150	289	80	3,5	60	30 (+15/-15)	34 (+17/-17)	50
SV 41/135/100	135	150	285	100	4	60	30 (+15/-15)	34 (+17/-17)	50
SV 41/135/120	135	150	285	120	4	60	30 (+15/-15)	34 (+17/-17)	50
SV 41/135/150	135	150	293	150	4,5	60	30 (+15/-15)	34 (+17/-17)	50

¹Not for permanent use (requires coordination) - the risk of breaking off the topcoat

On request

Other profile heights on request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by an corner guide. This profile is denoted by the index "E":
example SV-E 41/135/50

