



DEWMARK
STANDART

SV 24/70



Joint width
70 mm



Top
mounted



Movements in
6 directions



Protection
rating IP 52



Indoor/
outdoor




FLOOR COVERING

TILE

LINOLEUM

POLYMER

CONCRETE

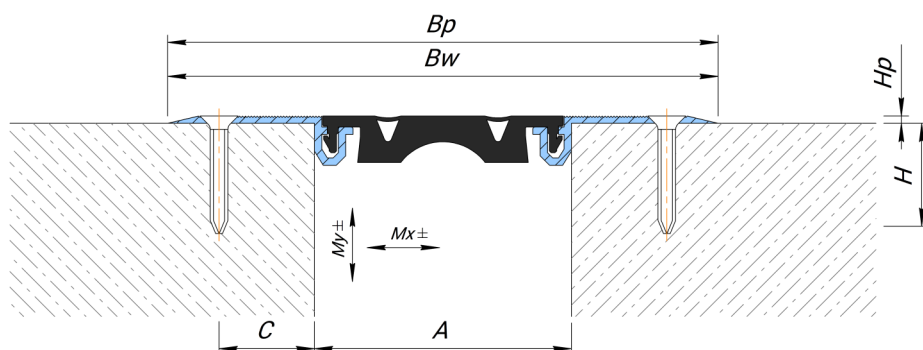

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6,
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN
SV 24/70	70	150	150	10	2	25	24 (+12/-12)	20 (+10/-10)	 pedestrian

! With heavy traffic, the flexible insert will be subject to wear.

On request

Profile insert can be made in
any color according to RAL
(see website www.ral.de).

Corner versions

All profiles have an corner version (wall to floor
under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E": *example*
SV-E 24/70

