



DEWMARK
STANDART

SV 21/50

Joint width
50 mm

Recess
mounted


Movements in
6 directions

Protection
rating IP 52

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

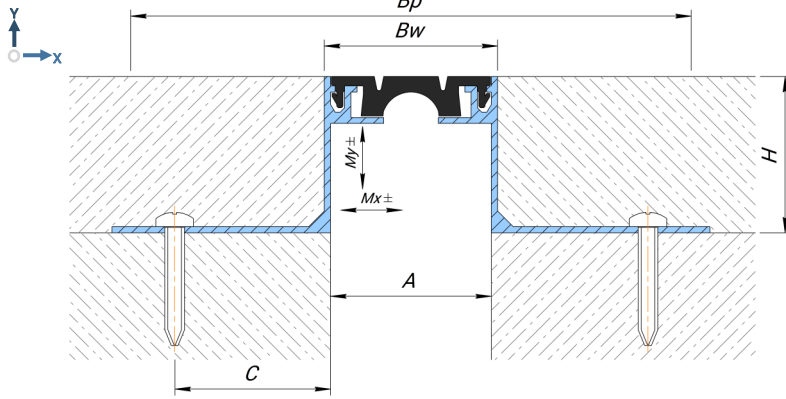

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6,
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 21/50/15	50	55	179	15	40	20 (+10/-10)	10 (+5/-5)	30 ²	-	-	-
SV 21/50/20	50	55	161	20	40	20 (+10/-10)	10 (+5/-5)	30 ²	-	-	-
SV 21/50/30	50	55	175	30	40	20 (+10/-10)	10 (+5/-5)	30 ²	100 ²	50 ²	-
SV 21/50/50	50	55	191	50	40	20 (+10/-10)	10 (+5/-5)	30	100	50	-
SV 21/50/70	50	55	179	50	40	20 (+10/-10)	10 (+5/-5)	30	100	50	-
SV 21/50/80	50	55	179	80	40	20 (+10/-10)	10 (+5/-5)	30	100	50	-
SV 21/50/H ¹	50	55	O/R	from 80	40	20 (+10/-10)	10 (+5/-5)	30	-	-	-

¹ H - mounting height profile. It is chosen in the range from 80 to 200 mm.

² Not for permanent use (requires coordination) - the risk of breaking off the topcoat.

! With heavy traffic, the flexible insert will be subject to wear.

On request

Profile insert can be made in
any color according to RAL
(see website www.ral.de).

Corner version

All profiles have an corner
version (wall to floor under
an angle of 90 degrees).
One of the guides is re-
placed by an corner guide.
This profile is denoted by
the index "E":
example SV-E 21/50/15

