



DEWMARK
HEAVY

SV 46/155



Joint width
155 mm



Top
mounted



Max load
100 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

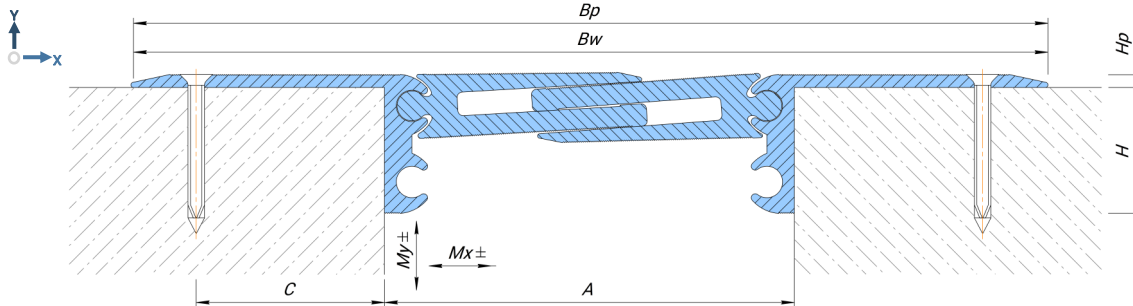

Technical data

| | |
|----------------|------------------------|
| MATERIAL | Aluminium EN AW 6060T6 |
| LENGTH | 3 meters |
| STANDARD COLOR | silvery white |

| Profile | A (mm) | Bw (mm) | Bp (mm) | H (mm) | Hp (mm) | C (mm) | Mx (mm) | My (mm) | Load bearing capacity, kN | | | |
|-------------|--------|---------|---------|--------|---------|--------|--------------|--------------|---------------------------|-----|----|-----------------|
| | | | | | | | | | | | | |
| SV 46/155/N | 155 | 349 | 349 | 48 | 5 | 72 | 54 (+27/-27) | 60 (+30/-30) | 50 | 100 | 70 | 10 ¹ |

¹ Not for permanent use (requires coordination)

On request


Protective anodizing profile

Corner versions

All profiles have a corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by a corner guide.

This profile is denoted by the index "E":

example SV-E 46/155/N

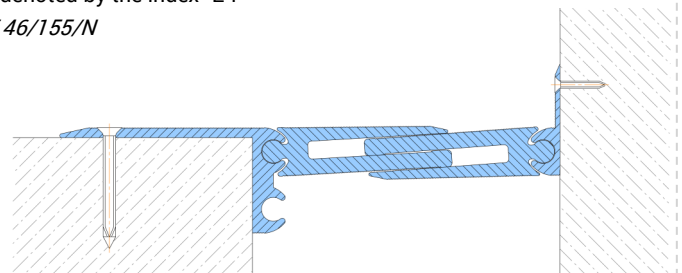

! For corner versions, only pedestrian loads are allowed.