



DEWMARK
WALL

AV 15

Joint width
100-1000 mm


Top
mounted

Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor

WALL COVERING TERAZZO STONE BRICK CONCRETE

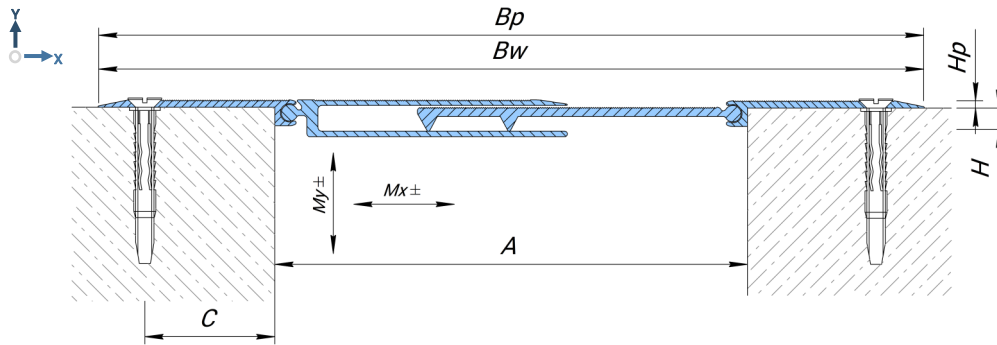

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

2.5 meters

STANDARD COLOR

silvery white


Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)
AV 15/100	100	196	196	5	2	35	60 (+30/-30)	30 (+15/-15)
AV 15/130	130	226	226	5	2	35	60 (+30/-30)	30 (+15/-15)
AV 15/170	170	266	266	5	2	35	70 (+35/-35)	30 (+15/-15)
AV 15/200	200	296	296	5	2	35	70 (+35/-35)	30 (+15/-15)
AV 15/230	230	326	326	5	2	35	60 (+30/-30)	30 (+15/-15)
AV 15/270	270	366	366	5	2	35	70 (+35/-35)	40 (+20/-20)
AV 15/300	300	396	396	5	2	35	70 (+35/-35)	40 (+20/-20)
AV 15/A ¹	O/R	O/R	O/R	5	2	35	70 (+35/-35)	50 (+25/-25)

On request

On request, the profile can be:

- Painted in any RAL color (see website www.ral.de).
- Anodizing in various colors and textures (see page decorative anodizing or send a request by e-mail).

A¹ — on request, the profile can be made to the required width of an expansion joint from 350 to 1000 mm.

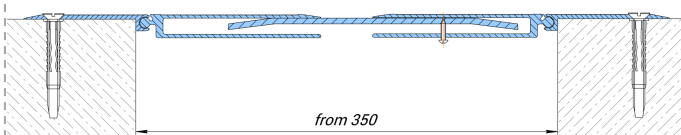

All profiles have an corner version (wall to wall, wall to floor, wall to ceiling under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E": example AV-E 15/130/15.

