



DEWMARK  
STANDART

SV 22/50



Joint width  
50 mm



Top  
mounted



Movements in  
6 directions




Protection  
rating IP 52



Indoor/  
outdoor

FLOOR COVERING    TILE    LINOLEUM    POLYMER    CONCRETE

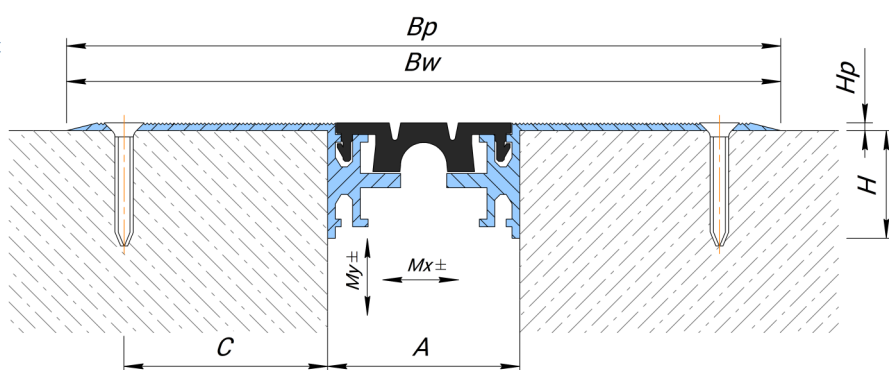

### Technical data

#### MATERIAL

Profile: aluminium EN AW 6060T6,  
Insert: PVC-P

#### LENGTH

3 meters

#### STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 22/50	50	186	186	28	2	50	16 (+8/-8)	10 (+5/-5)				
									30	70	50	-

! With heavy traffic, the flexible insert will be subject to wear.

### On request

Profile insert can be made in  
any color according to RAL  
(see website [www.ral.de](http://www.ral.de)).

### Corner versions

All profiles have an corner version (wall to floor  
under an angle of 90 degrees).  
One of the guides is replaced by an corner guide.  
This profile is denoted by the index "E":  
*example SV-E 22/50*

