



DEWMARK
STANDART

SV 13



Joint width
15-80 mm



Top
mounted



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → LINOLEUM → POLYMER → CONCRETE

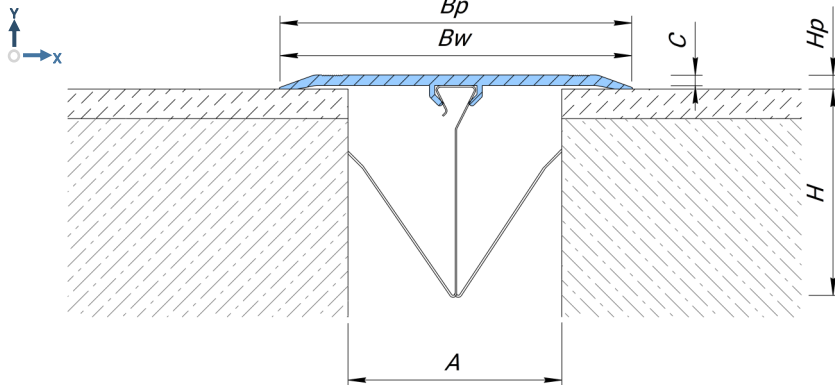

Technical data

MATERIAL

Aluminium EN AW 6060T6, Inox (clip)

LENGTH

3 meters fixing clips:
S – 2 pieces per meter
L – 1 piece per meter

STANDARD COLOR

light gray anodized aluminium

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN
SV 13/70/S	15-35	70	70	5	3	1,5	20 (+10/-10)	10 (+5/-5)	pedestrian
SV 13/70/L	35-80	70	70	5	3	1,5	30 (+15/-15)	10 (+5/-5)	pedestrian
SV 13/100/S	15-35	100	100	5	4	3	20 (+10/-10)	10 (+5/-5)	pedestrian
SV 13/100/L	35-80	100	100	5	4	3	40 (+20/-20)	10 (+5/-5)	pedestrian
SV 13/150/L	35-80	150	150	5	4	3	40 (+20/-20)	10 (+5/-5)	pedestrian
Corner versions (joint along the wall)									
SV-E 13/70	15-35	60	60	5	3	1,5	20 (+10/-10)	10 (+5/-5)	pedestrian

On request

Painted in any RAL color
(see website www.ral.de).

Anodizing in various colors and textures
(see page decorative anodizing or send a request by e-mail).

