



**DEWMARK
HEAVY**

SV 42/120



Joint width
120 mm



Top
mounted



Max load
50 kN




Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor

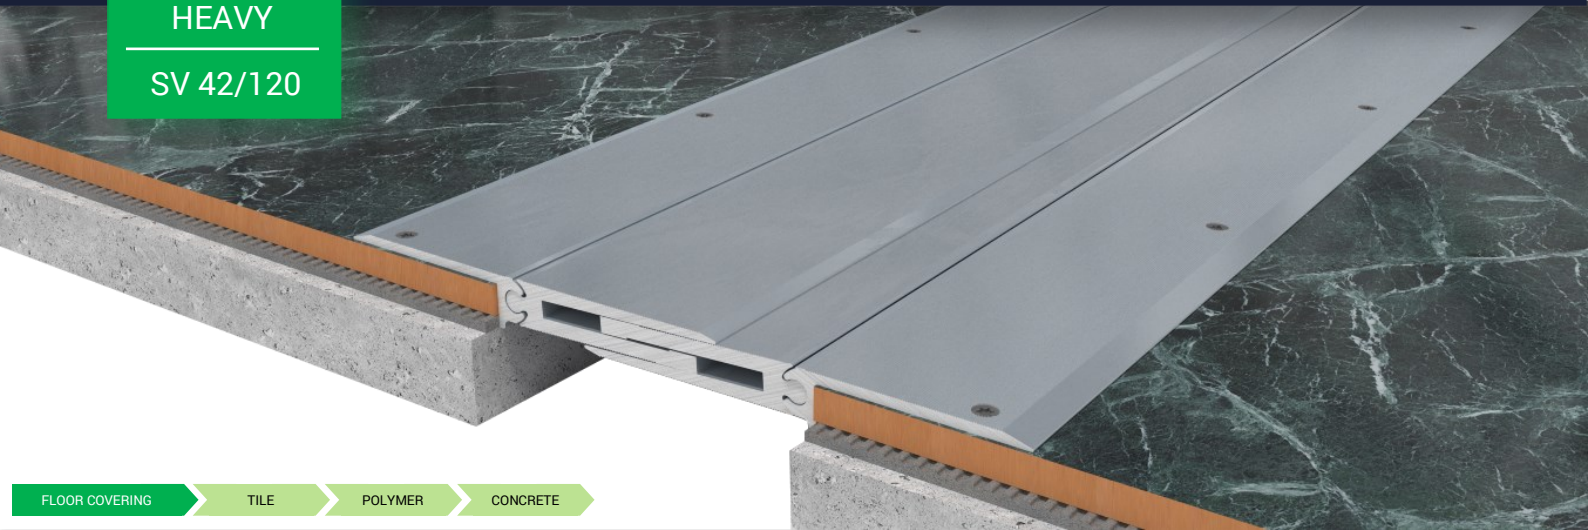

FLOOR COVERING → TILE → POLYMER → CONCRETE

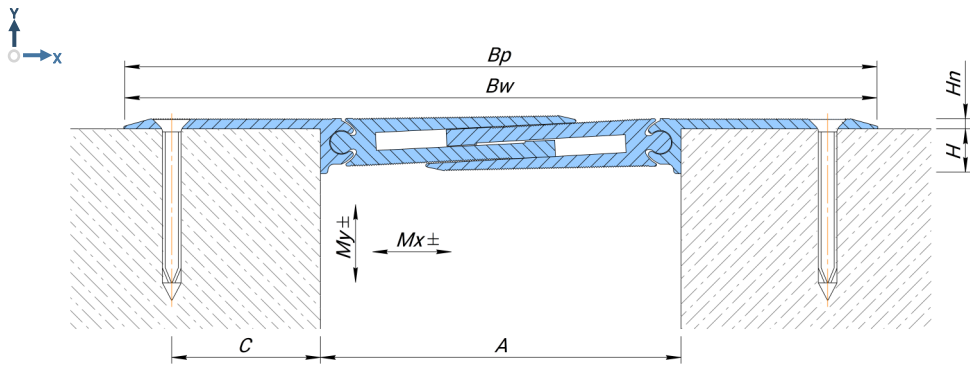

Technical data	
MATERIAL	Aluminium EN AW 6060T6
LENGTH	3 meters
STANDARD COLOR	silvery white

Profile	A (mm)	B _w (mm)	B _p (mm)	H (mm)	H _p (mm)	C (mm)	M _x (mm)	M _y (mm)	Load bearing capacity, kN			
SV 42/120/N	120	252	252	15	3,5	50	44 (+22/-22)	40 (+20/-20)	30	50	30	-

! Plastic and solid wheels are not recommended for use.

On request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by a corner guide.

This profile is denoted by the index "E":

example SV-E 42/120/N

