



DEWMARK
HEAVY

SV 46/180



Joint width
180 mm



Top
mounted



Max load
100 kN




Movements in
3 directions



Protection
rating IP 30



Indoor/
outdoor

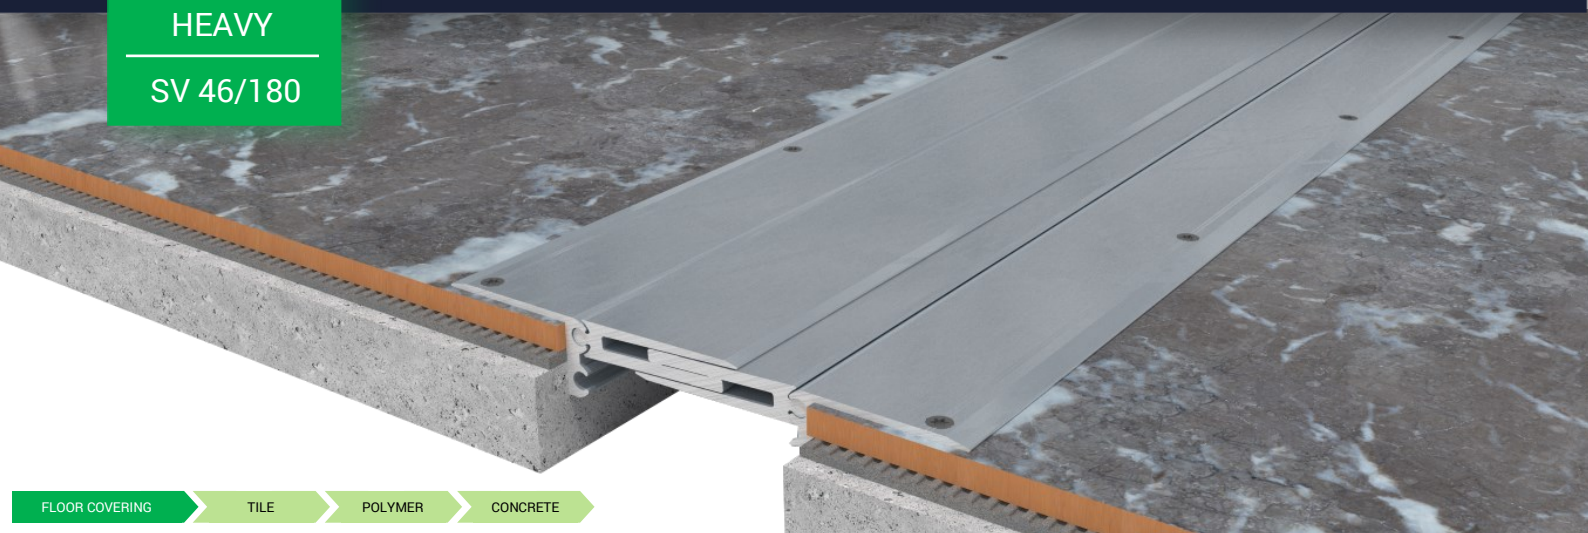


FLOOR COVERING

TILE

POLYMER

CONCRETE

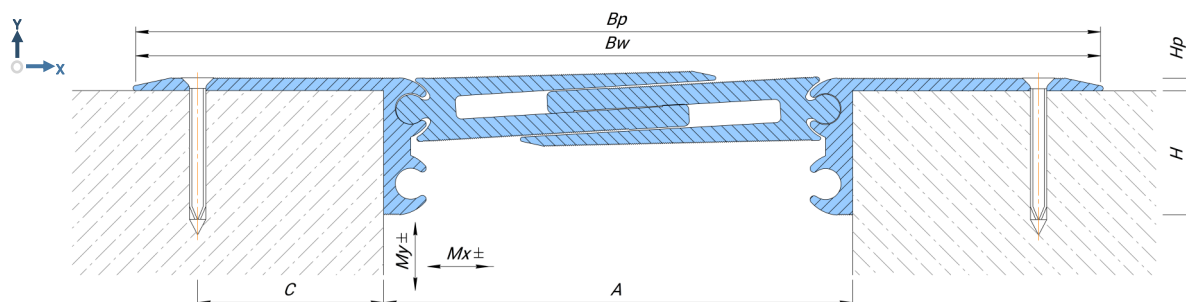

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 46/180/N	180	374	374	48	5	72	70 (+35/-35)	70 (+35/-35)				
									50	100	70	10 ¹

¹ Not for permanent use (requires coordination)

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

On request


Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SV-E 46/180/N

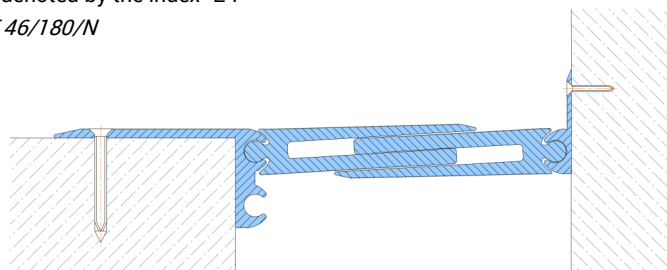

! For corner versions, only pedestrian loads are allowed.