



DEWMARK
STANDART

SV 16



Joint width
10-200 mm



Top
mounted



Movements in
2 directions




Protection
rating IP 30



Indoor/
outdoor

FLOOR COVERING TILE LINOLEUM POLYMER CONCRETE

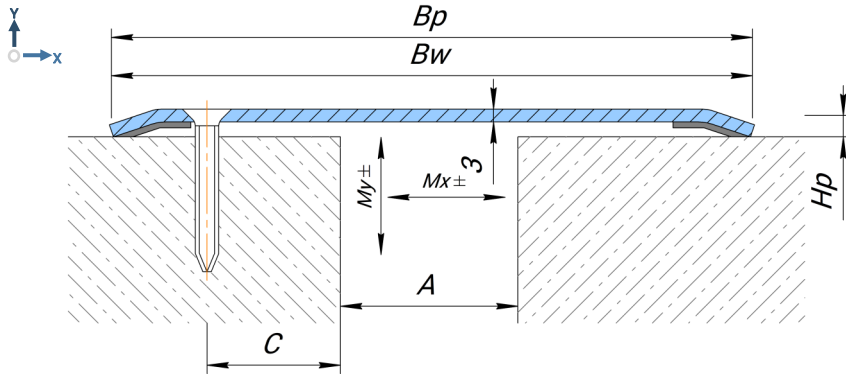

Technical data

MATERIAL

Inox AISI 430

LENGTH

2,5 meters

STANDARD COLOR

light gray

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
AV 16/70 SS	0-20	70	70	-	5	25	20 (+10/-10)	- ¹	pedestrian			
AV 16/100 SS	20-40	100	100	-	5	25	30 (+15/-15)	- ¹	pedestrian			
AV 16/120 SS	40-60	120	120	-	5	25	30 (+15/-15)	- ¹	pedestrian			
AV 16/150 SS	60-80	150	150	-	5	25	40 (+20/-20)	- ¹	pedestrian			
AV 16/200 SS	80-120	200	200	-	5	25	50 (+25/-25)	- ¹	pedestrian			
AV 16/300 SS	120-200	300	300	-	5	25	70 (+35/-35)	- ¹	pedestrian			

¹ Movement along the Y axis is not allowed.

On request

Made of black steel with powder coating on RAL
(with BS index and paint number: *Example SV 16/150/7035 BS*).

Produced another visible width Bw.

Corner versions

All profiles have an corner version
(wall to wall, wall to floor, wall to ceiling
under an angle of 90 degrees).

