



DEWMARK
HEAVY

SG 32/55



Joint width
55 mm



Top
mounted



Max load
50 kN



Movements in
3 directions



Protection
rating IP 30



Indoor/
outdoor




FLOOR COVERING

TILE

POLYMER

CONCRETE

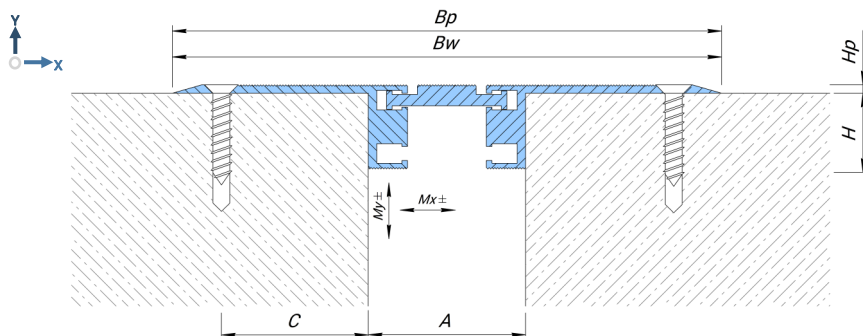

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SG 32/55/N	55	195	195	27	3	50	14 (+7/-7)	4 (+2/-2)				
									30	50	50	-

! Plastic and solid wheels are not recommended for use.

On request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SG-E 31/35/15