



**DEWMARK  
HEAVY**

**SV 46/230**



Joint width  
230 mm



Top  
mounted



Max load  
100 kN



Movements in  
3 directions




Protection  
rating IP 30



Indoor/  
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

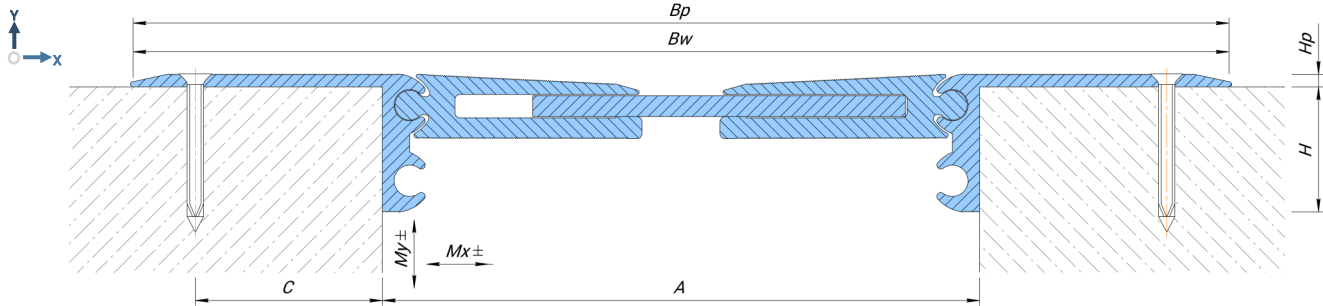

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 46/230/N	230	424	424	48	5	72	60 (+30/-30)	60 (+30/-30)	50	100	70	10 <sup>1</sup>

<sup>1</sup> Not for permanent use (requires coordination)

### Technical data

**MATERIAL**

Aluminium EN AW 6060T6

**LENGTH**

3 meters

**STANDARD COLOR**

silvery white

### On request


Protective anodizing profile

### Corner versions

All profiles have a corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by a corner guide.

This profile is denoted by the index "E":

example SV-E 46/230/N

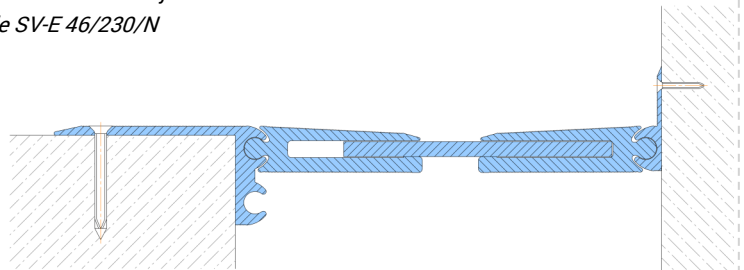

**!** For corner versions, only pedestrian loads are allowed.